

supplementary

Transparent MXene-Polymer Supercapacitive Film Deposited using RIR-MAPLE

Alec Ajnsztajn ^{1,†}, Spencer Ferguson ^{2,†}, James O. Thostenson ², Edgard Ngaboyamahina ², Charles B. Parker ², Jeffrey T. Glass ^{2,3,*} and Adrienne D. Stiff-Roberts ^{2,3*}

¹ Department of Mechanical Engineering and Materials Science, Duke University, Durham, NC, USA 27708; alec.ajnsztajn@duke.edu

² Department of Electrical and Computer Engineering, Duke University, Durham, NC, USA 27708; spencer.ferguson@duke.edu (S.F.); james.thostenson@duke.edu (J.O.T.); Edgard.Ngaboyamahina@duke.edu (E.N.); charles.parker@duke.edu (C.B.P.)

³ University Program in Materials Science and Engineering, Duke University, Durham, NC USA 27708

† Authors contributed equally to this work.

* Corresponding Authors: jeff.glass@duke.edu (J.T.G.); adrienne.stiffroberts@duke.edu (A.D.S.R.)

Received: 31 January 2020; Accepted: 25 February 2020; Published: date

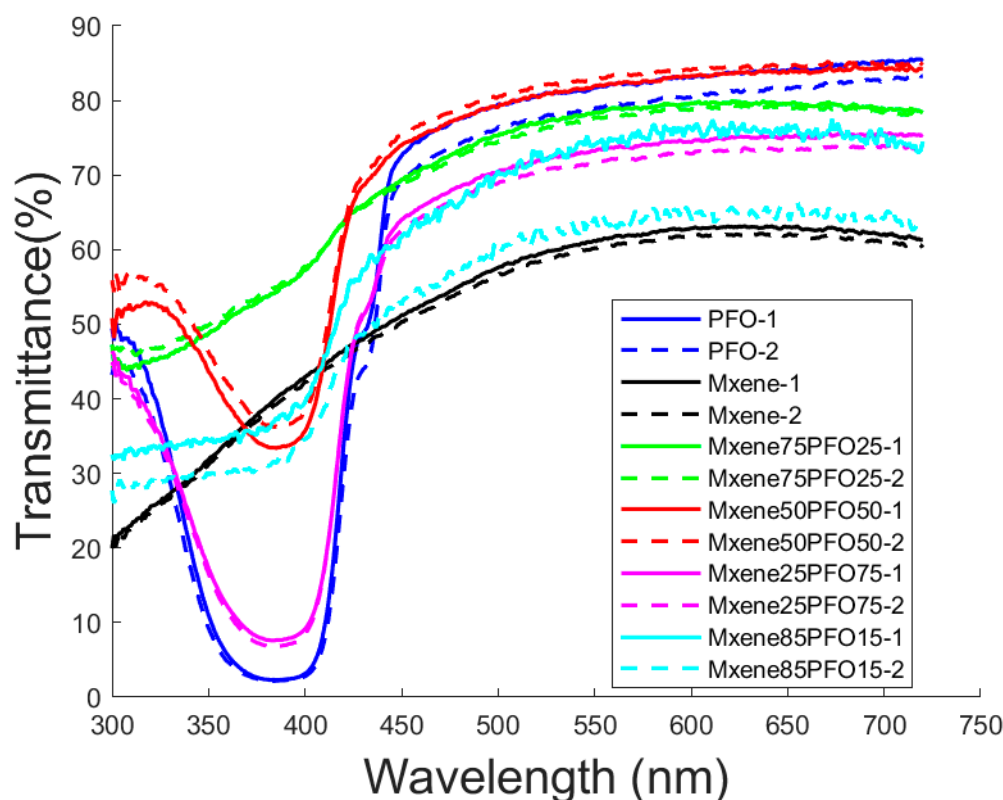


Figure S1. Transmittance plotted against wavelength for the full visible light spectrum. Two measurements were taken for each sample, one indicated as a solid line and the other dashed. PFO shows a large absorbance at 400 nm and a shoulder at 430 nm which indicates the presence of a crystalline phase of the polymer. A pure MXene film yields the lowest overall transmittance which increases with the addition of PFO.



© 2019 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).