

# Evaluation of the Recovery of Furfural from Wood Scraps <sup>†</sup>

Mariana Celman, Leandro Gutierrez , Carla Ormachea and Cristián Ferretti \* 

Group of Organic Synthesis and Materials (GSOM), Laboratorio Fester—Química Orgánica (FIQ), Instituto de Química Aplicada del Litoral (IQAL) (UNL-CONICET), Universidad Nacional del Litoral, Santa Fe S3000, Argentina; marianacelman@hotmail.com (M.C.); lgutierrez@fiq.unl.edu.ar (L.G.); cormachea@fiq.unl.edu.ar (C.O.)

\* Correspondence: cferretti@fiq.unl.edu.ar

<sup>†</sup> Presented at the 25th International Electronic Conference on Synthetic Organic Chemistry, 15–30 November 2021; Available online: <https://ecsoc-25.sciforum.net/>.

**Abstract:** 2-furfuraldehyde, commonly known as furfural, is a product of the hydrolysis and dehydration of pentose carbohydrates contained in lignocellulosic. Furfural is currently a commodity chemical, identified as one of the most promising chemical platforms directly derived from biomass, to produce chemicals, biofuels, and additives. Wood scraps are a good source of natural pentoses that contains up to 25%. Taking this into account, the goal of the research was to evaluate the recovery of furfural from wood scraps. The process of recovery of furfural was carried out by acid-catalyzed pentoses dehydration, associated with a hydrodistillation. As a catalyst, we used a solution of hydrochloric acid of 10% wt. The physicochemical analysis of the samples obtained allowed us to characterize and evaluate the recovery process. The results showed that under the experimental conditions evaluated, the degree of recovery of furfural was about 5%.

**Keywords:** furfural; recovery; biomass



**Citation:** Celman, M.; Gutierrez, L.; Ormachea, C.; Ferretti, C. Evaluation of the Recovery of Furfural from Wood Scraps. *Chem. Proc.* **2022**, *8*, 8. <https://doi.org/10.3390/ecsoc-25-11715>

Academic Editor: Julio A. Seijas

Published: 14 November 2021

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



**Copyright:** © 2021 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction

2-furfuraldehyde, commonly known as furfural, is a product of the hydrolysis and dehydration of pentose carbohydrates contained in lignocellulosic. It was first isolated by Dobereiner in 1832 as a byproduct of formic acid synthesis.

Furfural is currently a chemical commodity, identified as one of the most promising chemical platforms directly derived from biomass, to produce fine chemicals such as biofuels, plastics, and additives [1,2].


The interest in furfural production through biomass conversion is not only due to the economic availability of raw materials but is also a more ecological alternative than using fossil fuels from the petrochemical industry [3,4].

Large amounts of waste are produced by the wood industry, with this being one of the most important sources for biomass production, containing up to 25% of natural pentoses [5–7].

Taking this into account, in this work, the recovery of furfural from wood scraps was evaluated.

## 2. Material and Methods

The process of furfural recovery was carried out by acid-catalyzed pentose dehydration, according to Figure 1. First, the wood scrap was ground in order to decrease its size. Subsequently, a known amount of ground wood scrap was added into hydrodistillation equipment with 300 mL of a hydrochloric acid solution of 10% wt., and the mixture was brought to its boiling point to promote polysaccharide hydrolysis. The distilled fraction was neutralized with sodium carbonate, and then sodium chloride was added.

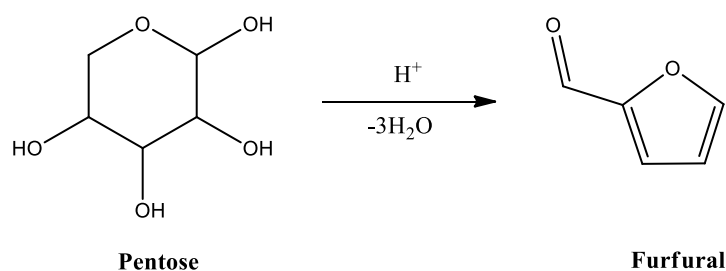

**Figure 1.** Acid-catalyzed pentose dehydration process.

To isolate the desired product, a second hydrodistillation was carried out until 50 mL of distilled product was obtained. The collected fraction was saturated with sodium chloride and then transferred to a separate funnel. Three extractions were carried out using 20 mL of diethyl ether as solvent. The solvent was evaporated until a yellow oily compound is observed.

The recovery was evaluated with the following Equation (1):

$$R (\%) = \left( \frac{m_0}{m} \right) \cdot 100 \quad (1)$$

where  $m_0$  (g) is the weight of furfural and  $m$  (g) is the weight of wood scrap powder.

### 3. Results and Discussion

Among the organic compounds that can be obtained from biomass, furfural is probably one of the most important molecules. Considering that wood scraps are a source of pentoses, we evaluated the recovery of furfural by a simple process.

Previously, in this study, we optimized a protocol of furfural recovery from wheat bran, obtaining a recovery of 3.4%. Then, we evaluated the effect of the use of soft experimental conditions on the furfural recovery. A set of experiments was carried out with this protocol over different ratios (weight of wood scrap/volume of hydrochloric acid solution), and the recovery was analyzed. As can be seen in Table 1, furfural recoveries of 4.8–5.5% were obtained. These results showed that over the experimental conditions evaluated, an excess of hydrochloric acid solution is used to catalyze the dehydration of pentoses from wood scraps. Although an excess of the catalyst was used in all experiments, the furfural obtained has shown the same physicochemical properties as commercial furfural.

**Table 1.** Evaluation of furfural recovery at different wood scrap amounts used.

Entry	Wood Scrap [% wt.]	Furfural Recovery [%]
1	25	5.4
2	20	5.0
3	15	5.5
4	10	4.8
5	5	5.1

## 4. Conclusions

The isolation of furfural through pentose dehydration over soft conditions was analyzed. Under soft experimental conditions, furfural was successfully recovered from the wood scrap with a degree of recovery around 5%. However, additional studies must be carried out to reduce the amount of catalyst used in the process.

**Author Contributions:** Conceptualization, C.F.; methodology, L.G.; formal analysis, M.C.; writing—original draft preparation, L.G.; writing—review and editing, C.O.; supervision, C.F. All authors have read and agreed to the published version of the manuscript.

**Funding:** This research was funded by Universidad Nacional del Litoral (CAI+D2020) and the Ministerio de Ciencia, Tecnología e Innovación Productiva de Santa Fe (IO2019), Santa Fe, Argentina.

**Institutional Review Board Statement:** Not applicable.

**Informed Consent Statement:** Not applicable.

**Data Availability Statement:** Not applicable.

**Acknowledgments:** This research was supported by Universidad Nacional del Litoral (CAI+D2020) and the Ministerio de Ciencia, Tecnología e Innovación Productiva de Santa Fe (IO2019), Santa Fe, Argentina.

**Conflicts of Interest:** The authors declare no conflict of interest.

## References

1. Mariscal, R.; Maireles-Torres, P.; Ojeda, M.; Sádaba, I.; López Granados, M. Furfural: A renewable and versatile platform molecule for the synthesis of chemicals and fuels. *Energy Environ. Sci.* **2016**, *9*, 1144–1189. [[CrossRef](#)]
2. Trimble, F.; Dunlop, A.P. Recovery of Furfural from Aqueous Solutions. *Ind. Eng. Chem. Anal. Ed.* **1940**, *12*, 721–722. [[CrossRef](#)]
3. Luo, Y.; Li, Z.; Li, X.; Liu, X.; Fan, J.; Clark, J.; Hu, C. The production of furfural directly from hemicellulose in lignocellulosic biomass: A review. *Catal. Today* **2019**, *319*, 14–24. [[CrossRef](#)]
4. Lee, C.B.T.L.; Wu, T.Y. A review on solvent systems for furfural production from lignocellulosic biomass. *Renew. Sust. Energ.* **2021**, *137*, 110172. [[CrossRef](#)]
5. Gebre, H.; Fisha, K.; Kindeya, T.; Gebremichal, T. Synthesis of furfural from bagasse. *Int. Let. Chem.* **2015**, *57*, 72–84. [[CrossRef](#)]
6. Greinert, A.; Mrówczyńska, M.; Szefner, W. The Use of Waste Biomass from the Wood Industry and Municipal Sources For Energy Production. *Sustainability* **2019**, *11*, 3083. [[CrossRef](#)]
7. Zakzeski, J.; Bruijninx, P.C.A.; Jongerius, A.L.; Weckhuysen, B.M. The catalytic valorization of lignin for the production of renewable chemicals. *Chem. Rev.* **2010**, *110*, 3552–3599. [[CrossRef](#)] [[PubMed](#)]