



Article

# Appraisal of Environmental Health and Ecohydrology of Free-Flowing Aghanashini River, Karnataka, India

T. V. Ramachandra <sup>1,2,3,\*</sup>, Vinay Shivamurthy <sup>1,4,5</sup>, Asulabha K. Subramanian <sup>1</sup>, Sincy Varghese <sup>1</sup>, Bharath Setturu <sup>1</sup> and Bharath H. Aithal <sup>1,4</sup>

- Centre for Ecological Sciences (CES), Energy & Wetlands Research Group, Indian Institute of Science (IISc), Bangalore 560012, India; svinay@iisc.ac.in (V.S.); asulabhas@iisc.ac.in (A.K.S.); sincyv@iisc.ac.in (S.V.); setturb@iisc.ac.in (B.S.); bharath@infra.iitkgp.ac.in (B.H.A.)
- <sup>2</sup> Centre for Sustainable Technologies (ASTRA), Indian Institute of Science (IISc), Bangalore 560012, India
- Centre for Infrastructure, Sustainable Transportation and Urban Planning (CiSTUP), Indian Institute of Science (IISc), Bangalore 560012, India
- <sup>4</sup> Ranbir and Chitra Gupta School of Infrastructure Design and Management (RCG SIDM), IIT-Kharagpur, Kharagpur 721302, India
- Department of Civil Engineering, SR University, Warangal 506371, India
- \* Correspondence: tvr@iisc.ac.in or energy.ces@iisc.ac.in; Tel.: +91-080-22933099 or +91-080-23608661

**Abstract:** Rivers are vital freshwater resources that cater to the needs of society. The burgeoning population and the consequent land-use changes have altered the hydrologic regime with biophysical and chemical integrity changes. This necessitates understanding the land-use dynamics, flow dynamics, hydrologic regime, and water quality of riverine ecosystems. An assessment of the land-use dynamics in the Aghanashini River basin reveals a decline in vegetation cover from 86.06% (1973) to 50.78% (2018). The computation of eco-hydrological indices (EHI) highlights that the sub-watersheds with native vegetation had higher infiltration (and storage) than water loss due to evapotranspiration and meeting the societal demand. The computation of water quality index helped to assess the overall water quality across seasons. The study provides insights into hydrology linkages with the catchment landscape dynamics to the hydrologists and land-use managers. These insights would aid in the prudent management of river basins to address water stress issues through watershed treatment involving afforestation with native species, appropriate cropping, and soil conservation measures.

**Keywords:** eco-hydrological indices; flow regime; land use; multivariate analysis; water quality; water quality indices (WQI)



Citation: Ramachandra, T.V.; Shivamurthy, V.; Subramanian, A.K.; Varghese, S.; Setturu, B.; Aithal, B.H. Appraisal of Environmental Health and Ecohydrology of Free-Flowing Aghanashini River, Karnataka, India. Water 2022, 14, 977. https://doi.org/ 10.3390/w14060977

Academic Editors: Zengxin Zhang, Xuchun Ye and Yixing Yin

Received: 20 January 2022 Accepted: 16 March 2022 Published: 20 March 2022

**Publisher's Note:** MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2022 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (https://creativecommons.org/licenses/by/4.0/).

## 1. Introduction

The aquatic ecosystem plays a vital role in sustaining ecological processes and the basic needs of society. Ecosystem quality varies due to natural processes (such as climatic factors, precipitation, soil erosion, weathering of rocks, soil quality, and watershed characteristics) and anthropogenic factors such as land-use changes, overexploitation of water resources, and agricultural practices [1,2]. During the twenty-first century, the planning, development, and management of aquatic resources relied on human-centric factors such as population, per capita water demand, agriculture production, and socio-economic activities [3]. Developing countries in the tropics have been facing water stress due to large-scale land cover changes from deforestation [4,5], unplanned developmental activities, and unprecedented and unscientific agriculture practices with extensive water abstraction [6–9]. The overexploitation of freshwater resources to cater to burgeoning societal needs has compromised the health and sustainability of resources in India and across the globe [10,11]. Anthropogenic activities coupled with skewed policies have resulted in the disappearance of pristine forests [12–14] in the catchment, affecting biogeochemical dynamics [4,15–17]. The structural changes in the catchment (landscape) have affected the functional aspects of

Water 2022, 14, 977 2 of 19

ecosystems, thereby impairing the assimilative and supportive capacity [18,19] of fragile ecosystems. The impacts are evident with the recurring instances of droughts and floods and with the shortages of quality water affecting the regional economy and people's livelihoods [20]. The conservation of forests with native species in the catchment has helped sustain the hydrological regime and maintain biodiversity [21].

The integrity of the catchment of aquatic ecosystems decides water sustenance, as vegetation helps in retarding the velocity of water by allowing impoundment and groundwater recharge through infiltration. At the same time, another fraction returns to the atmosphere through evapotranspiration. Forests with native species of plants would aid as sponges, retaining and regulating the transfer of water between land and atmosphere [21]. The mechanism by which vegetation controls the flow regime is dependent on various bio-physiographic characteristics, namely, the type of vegetation, the species composition, maturity, density, structure, aerodynamic and surface resistance, root density and depth, and the hydro-climatic conditions [22]. The roots of diverse terrestrial vegetation provide habitats for diverse microflora and fauna, and with microbial actions, the soil has higher porosity or permeability, thereby enabling efficient infiltration. These functions depend on the diversity and maturity of the forests, and the density of plant species. This necessitates safeguarding and maintaining the existing native forest patches to sustain the hydrological regime, which caters to biotic (ecological and societal) demands. An undisturbed native forest has a consistent hydrologic regime with sustained flows during lean seasons [21,22].

Generally, ecosystems permit complex interactions among abiotic and biotic entities to recover from minor perturbations [21–23]. It is necessary to maintain the quantity, quality, and timing of flow [23,24], which is also known as ecological flow [25–27] across all segments of the riverine systems for the sustainable functioning of freshwater resources. This emphasizes understanding the hydrologic regime and the consumption behavior and transactions of resources among/between ecological and societal activities [28]. The hydrological regime sustaining the biotic components is referred to as an eco-hydrological footprint.

The physical, chemical, and biological characteristics of aquatic ecosystems are determined by water quality assessments [29]. The long-term and continuous monitoring of surface water bodies provides insights into the spatial and temporal variability in water quality [30,31]. Alterations in water quantity and quality govern the species composition, ecosystem productivity, and physiological conditions of aquatic organisms. Altered flows due to changes in ecosystem conditions influence the fish population, bringing about changes in habitat, food availability, community structure, composition, and behavior [32]. Pollutants such as heavy metals cause a severe threat to living organisms and humans as they are toxic and persist for a more extended period in nature, resulting in their bioaccumulation in the food chain [33,34].

Various statistical approaches have been adapted for interpreting water quality variables [35,36]. Furthermore, the computation of water quality indices (WQI) aid in understanding the suitability of water for anthropogenic purposes. Multivariate analysis such as cluster analysis (CA) and principal component analysis (PCA) aid in understanding spatial-temporal variations, a grouping of monitored stations, and identification of important factors that influences the quality of streams [37–40].

The Aghanashini River in the central Western Ghats is a free-flowing river that supports rich biodiversity and sustains people's livelihoods. The catchment of this river is witnessing land cover changes due to increasing societal demands. This necessitates understanding landscape dynamics with biodiversity, hydrologic regime, and water quality characteristics for the prudent management of fragile aquatic ecosystems.

The eco-hydrological footprint assessment of a river considers water availability, water quality characteristics, and water demand for the sustenance of biotic components. The objective of the current research is to assess the eco-hydrological footprint of the Aghanashini River basin at the sub-catchment level, considering various societal demands, ecological needs, and water availability. This entailed land use analysis; spatio-temporal analyses of annual rainfall data, hydrological and ecological footprint, the computation


Water 2022, 14, 977 3 of 19

of eco-hydrological indices (EHI), eco-hydrological footprint, and water quality indices (through water quality assessment).

#### 2. Materials and Methods

#### 2.1. Study Area

Aghanashini is one of the few rivers flowing towards the west without major anthropogenic interventions (free-flowing river). Earlier studies confirm diverse flora and fauna along the riverscape [4,15,16,18,19,41] compared to the adjacent river catchments. This west-flowing river originates at Manjaguni and Shankara Honda (Sirsi) [20,41,42] and traverses a distance of 128 km [43] and joins the Arabian Sea. The catchment area of Aghanashini is about 1449 km<sup>2</sup> [42]. It is spread across the coastal and hilly agro-climatic zones in Siddapura, Sirsi, Ankola, and Kumta taluks of Uttara Kannada district [44]. The population has increased by 9.2% from 221,562 (2001) to 241,884 (2011) in the catchment [45]. The population is projected to increase to 264,137 by 2021. Elevation in the river catchment ranges between 0 and 786 m ASL. The undulating terrain of the Sahyadrian (Ghats) has denser stream networks, and the coastal regions have a sparse stream network with the broader riverbeds. The soil in the catchment is mainly clayey skeletal, loamy skeletal, along with clayey, fine, sandy, and loamy soils [46]. Figure 1 depicts the location of the Aghanashini River basin in Uttara Kannada district, Karnataka State, India, with the population density, topography, lithology, and agro-climatic zones. These spatial layers were generated using open-source GIS (QGIS) with the data compiled from the secondary sources (topographic maps of the Survey of India, Census data) and field data (collected using pre-calibrated handheld global positioning system (GPS)).

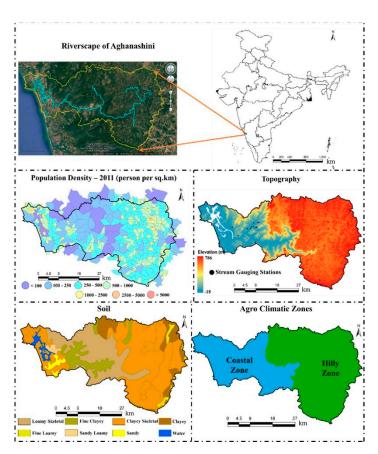


**Figure 1.** Aghanashini River catchment—population density, topography, soil, and agroclimatic zones.

Water 2022, 14, 977 4 of 19

#### 2.2. Method

The data used for the analyses are listed in Supplementary Table S1, which were collected from the field (primary source), and secondary sources such as spatial data (Remote sensing data—RS) acquired at regular intervals through space-borne sensors [47], rainfall data [48–50], extra-terrestrial solar radiation and temperature data [51,52], temporal population data [45], livestock data [53], meteorological data [49], agriculture and crop information [44,50], topographic maps [43], virtual online remote sensing data [54,55], and catchment conditions [56]. Remote sensing data were preprocessed to eliminate positional errors, and geometric corrections were made using ground control points obtained from field (using GPS), the Survey of India topographic maps of Scale 1:50,000, and virtual earth databases [54,55]. Radiometric corrections were made to enhance the scene radiometric properties (contrast enhancement) for better interpretation of the data [57,58]. The protocol adopted for assessing the eco-hydrologic and environmental regimes (physicochemical and biological integrity) with the landscape dynamics in the Aghanashini River catchment is given in Supplementary Figure S1.

Fieldwork was carried out for 38 months (during June 2016 to May 2019) to understand the seasonal variability of the water quality and flow characteristics at sampling locations (Figure 2) in various streams across various micro-watersheds of the Aghanashini River basin in the Central Western Ghats. The data collected from the field include training data for land use analysis, flow dynamics, physical, chemical, and biological quality of water in the selected streams, hydrological regime, and ecological footprint. Flow dynamics (discharge) in select streams of the micro watershed were gauged monthly at sampling locations (Figure 2) using a current meter (or float based on site conditions) with the area velocity relationships and extrapolated to ungauged streams [56]. Water quality changes in relation to land use, flow regime, and across seasons are assessed at the sub-catchment level (Chandikaholé) through continuous field monitoring for 28 months of 9 streams.

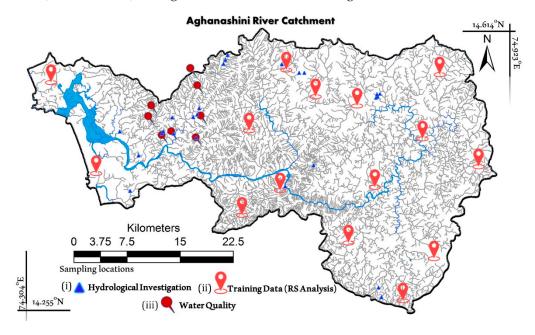

**Figure 2.** Locations of (i) gauging flow discharges, (ii) training data for remote sensing data analyses, and (iii) water sample collection (for assessing physical, chemical, and biological quality).

#### 2.2.1. Land Use Dynamics

Land use analyses involved (i) generation of false-color composite (FCC) of remote sensing (RS) data (bands-green, red, and NIR). FCC helped in locating heterogeneous patches for choosing training polygons in the landscape; (ii) selection of training polygons covering 15% of the study area and polygons are uniformly distributed over the entire study area, covering all land use categories; (iii) loading these training polygons co-ordinates

Water 2022, 14, 977 5 of 19

into pre-calibrated GPS; (vi) collection of the corresponding attribute data (land-use types) for these polygons from the field; (iv) supplementing this information with the data from the online data portal [54]; (v) 60% of the training data were used for classification; and (vi) the balance is used for validation or accuracy assessment. The land use analysis was performed using a supervised classification technique based on a Gaussian maximum likelihood algorithm with training data. Accuracy assessment (computation of Kappa statistics, overall accuracy, producer accuracy, and user accuracy) was carried out by comparing the classification output with the training data (field observations) collected using GPS [57–59].

# 2.2.2. Assessment of Hydrological Footprint, Ecological Footprint, and Eco-Hydrologic Footprint

Hydrological regime analyses involved the quantification of (i) run-off, (ii) infiltration, (iii) soil water availability, (iv) sub-surface (vadose) flow, (v) groundwater recharge, (vi) evapotranspiration (PET from vegetation), and (vii) assessment of the hydrologic regime as a function of various factors such as land use, precipitation, temperature, solar radiation, soil characteristics, geology, and topography [12,56,60,61]. Temporal rainfall data of all rain gauges in the catchment were compiled from India Meteorological Department (IMD) [49] and the Directorate of Economics and Statistics, GoK [50]. The average monthly and annual rainfall data [61,62] were used to understand the spatial pattern of rainfall in the study area to derive the gross yield and net yield by considering interception [56].

Stream gauging also aided in calibrating the run-off model at sub-basin levels. Run-off is computed by considering land use and rainfall based on the rational formula [56]. The physical parameters for water supply include run-off (overland flow), infiltration (subsurface and groundwater recharge), and soil water availability. After precipitation, a portion of the rainfall that flows in the streams is (i) surface run-off or direct run-off and (ii) subsurface run-off. Surface run-off refers to the portion of water that directly enters into the streams during rainfall, which is estimated based on the empirical relationships [9–11,21,22] considering run-off coefficient, depending on land uses [56].

The portion of water that enters the subsurface (vadose and groundwater zones) during precipitation depends on land cover in the catchment. During field monitoring of streams in the forested catchment, overland flow is noticed in streams only after the saturation of subsurfaces. The water stored in sub-surfaces will flow laterally towards streams and contribute to streamflow during non-monsoon periods, referred to as pipe flow (during post-monsoon) and base flow (during summer).

Water demand assessment included the societal (water for domestic purposes, agriculture, horticulture, livestock, and industrial) and ecological (to maintain the terrestrial and aquatic integrity) requirements. The societal water demand for agriculture, domestic, and livestock sectors was compiled from field observations and supplemented with secondary data from government agencies. Agriculture and horticulture demand were quantified considering crop types, cropping patterns, growth phase, and water requirements per crop. Domestic water demand was estimated considering daily water demand (Table S1). Similarly, water demand for livestock was quantified by considering animal type, population, and water requirements per animal (Table S1) [60]. Ecological (aquatic) water demand in the river is assessed by considering the flow regimes and biodiversity in micro-watersheds. Terrestrial water demand was estimated considering vegetation type-wise and actual evapotranspiration (AET) using the modified Hargreaves Method in the diverse landscape (details are given in Table S1).

Month-wise water availability and demand were computed to understand the ecohydrological footprint. The eco-hydrologic footprint helps in understanding water-scarce deficit (supply < demand) and surplus (supply > demand) situations. The hydrological flow regime in each catchment was assessed based on field observations, and streams were categorized into four groups [60]: A (perennial streams with 12 months of adequate water), B (8 months), C (6–8 months), and D (4 months, only during the monsoon).

Water 2022, 14, 977 6 of 19

The ecological footprint was assessed considering biotic elements (biodiversity), i.e., flora and faunal species. The spatial distribution and species richness of plants and animals in the river catchment were compiled from the field (transect based quadrat sampling) and the published literature—books [12,20,63–67], conference papers [18,41,68,69], journals [4,15,16,18,19,41,60,70–74], and web portals [75,76].

The eco-hydrological footprint of the Aghanashini River was evaluated considering the seasonal variability of water availability and water demand. The eco-hydrological footprint, forest cover, flow regime, and species distribution were compared across subbasins to understand the linkages and inter-relationships among hydro-ecological aspects. Based on these assessments, streams in a sub-catchment were considered for water quality assessment in relation to land use, flow regime, and other characteristics.

#### 2.2.3. Water Quality Assessment

Water quality assessment was carried out in select streams of the Chandikaholé subcatchment of the Aghanashini River basin (catchment id—8), and locations were chosen based on the eco-hydrological footprint, distribution of flora and fauna, and flow duration. The Chandikaholé stream originates near Yaana and joins the main river—Aghanashini at Bagribailu. Flow regime, water quality in the stream, and land uses were assessed in the micro- and macro-watersheds. Yaana, Nanalli, Beilangi, Mastihalla, and Harita are the micro-watersheds connecting Aanegundi (AGT1), whereas Aanegundi (AGT1 and AGT2) and Bialgadde (BGT) are the macro-watersheds. Aanegundi AGT1 and AGT2 join near Yaana Cross along the Sirsi-Kumta Road.

The streams in this catchment were monitored (Figure 2) for 28 months to understand the seasonal dynamics of water quality (18 physical and chemical parameters) at 9 sampling locations—Beilangi (BE), Yaana (YK), Nanalli (YNK), Harita (HA), Bialgadde (BGT), Aanegundi (AG), Aanegundi tributary 1 (AGT1), Aanegundi tributary 2 (AGT2), and Mastihalla (MH). Water temperature (WT—laboratory thermometer), dissolved oxygen (DO—Winkler's Method), discharge (current meter), electrical conductivity (EC), total dissolved solids (TDS), and pH (using Eutech: PCSTestr 35) were measured at the sampling location (on-site), while the other parameters such as total alkalinity (TA—titrimetric method); chemical oxygen demand (COD); biochemical oxygen demand (BOD); total hardness (TH) and calcium (Ca) using EDTA titrimetric method; magnesium (Mg); chloride (Cl—argentometric method); nitrate (phenol disulphonic acid method); orthophosphate (OP—stannous chloride method); sodium (Na) and potassium (K) using the flame emission photometric method were analyzed in the laboratory (off-site) according to the standard protocol [1,23,30,31,37,61]. Based on the temporal data, using a weighted arithmetic method, the water quality index (WQI) was computed [40,61,72] season-wise across sampling locations considering physicochemical parameters such as dissolved oxygen, electrical conductivity, total dissolved solids, pH, total alkalinity, total hardness, calcium, magnesium, chloride, and nitrate [40,61,72,73]. Water quality is graded as excellent (for WQI = 0 and 25); good (for WQI = 26–50); poor (for WQI = 51–75); very poor (for WQI = 76 and 100); and unfit for drinking (WQI > 100).

Multivariate analysis of season-wise and sampling location-wise water quality data through Pearson's correlation coefficient (r), CA, and PCA was carried out using PAST software [35,37,42,61,62] to understand the contributing factors of pollution. PCA of water quality parameters [37] of nine streams was performed, and the scree plot shows principal components explaining variance. Components with an eigenvalue >1 were considered significant, while <1 were omitted from further analysis.

#### 3. Results and Discussion

#### 3.1. Land Use Dynamics

Land uses in the Aghanashini River catchment are depicted in Figure 3, and details with the accuracy of classification are listed in the Supplementary Table S2, which reveals

Water 2022, 14, 977 7 of 19

a decline in forest cover from 86.06% (in 1973, 71.65% evergreen and 14.41% deciduous types) to 50.78% (in 2018, 23.95% evergreen and 26.83% deciduous).

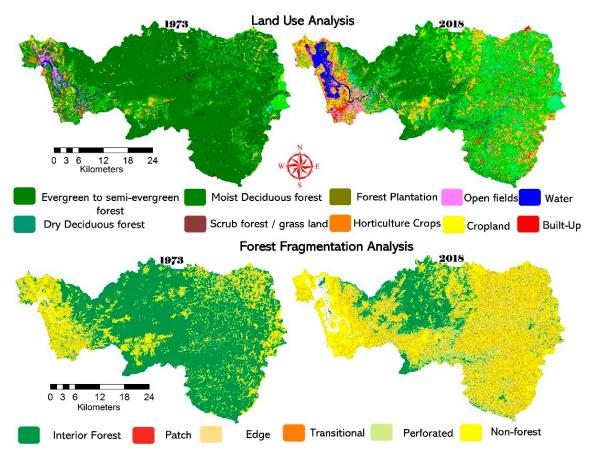


Figure 3. Land uses and extent of forest fragmentation in the Aghanashini River catchment.

The catchment is also witnessing the expansion of the commercial monoculture plantations (22.04%) of Acacia, Eucalyptus, and Arecanut, requiring a high quantity of water, evident from field observations of sustained water pumping and falling groundwater levels. Agriculture is practiced in the transition zones of Sirsi, the coastal areas of Kumta, followed by the Ghats, having patches of paddy cultivation (16.18%). Horticulture is prominent along the valley zones. Built-up areas constitute about 4.88% of the land use and are concentrated in towns—Kumta and Sirsi. Forest fragmentation analyses reveal a decline in interior forest cover from 66.30% (1973) to 17.76% (2018). The non-forest area now occupies about 49.34% (2018).

### 3.2. Assessment of Hydrological Footprint, Ecological Footprint, and Eco-Hydrologic Footprint

Spatio-temporal analyses show that annual rainfall ranges from <3000 mm in the transition zone to >5000 mm in the Ghats and about 4000 mm in coastal zones. Figure 4 depicts the variability in rainfall across space and time. The Southwest monsoon caters to more than 80% of the total, which occurs during June and September, with the highest precipitation during the month of July.

Water 2022, 14, 977 8 of 19

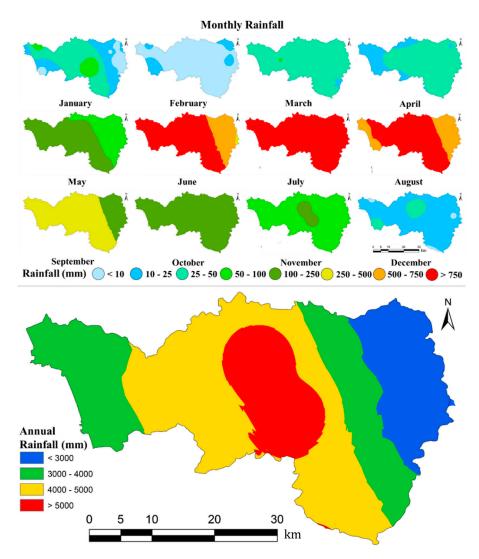


Figure 4. Spatio-temporal rainfall dynamics in the Aghanashini River basin.

Hydrological assessment in the Aghanashini River basin shows that gross annual rainfall in the catchment is about 3020 mm. Interception losses in the basin range between 651 mm and 1490 mm, with an average of 1042 mm. The Aghanashini River catchment has a forest cover of 60%. The run-off in the basin is about 766 mm, accounting for 1164 million cubic meters, and the balance is infiltrated, i.e., over 60% of the net rainfall is infiltrated, by the recharging subsurface (vadose and saturated zones) contributing to the subsurface flows (pipe flow and baseflow) during the non-monsoon period. Infiltration in the catchment is about 2412 million cubic meters, and the subsurface flow is about 455 million cubic meters, which caters to the water demand during all months.

The sector-wise water demand reveals that agriculture and horticulture sectors in the catchment require about 606 million cubic meter, domestic water (societal demand) is about 5.8 million cubic meter, and water required for livestock rearing is 3.8 million cubic meter. The environmental water demand includes terrestrial and aquatic ecosystems' demand. Terrestrial water demand is the water requirements of vegetation, i.e., AET from natural vegetation (forests), and is about 937 million cubic meter. The minimum water-sustaining biota during lean seasons in the aquatic ecosystem is about 483 million cubic meter, quantified based on field investigations, which constitutes about 30% of the total flow and is comparable to similar studies in the neighboring Sharavathi, Kali, and Gangavali river basins [21,26,41,60].

Water 2022, 14, 977 9 of 19

The assessment of the eco-hydrological footprint at the sub-catchment level was carried out considering (i) the biotic demands of blue water demand (agriculture, domestic, livestock, and aquatic ecological needs) and green water demand (evapotranspiration) and (ii) the hydrologic regime considering the surface (overland) flow and subsurface (vadose and saturated zones) flow (pipe and baseflow) [21].

The eco-hydrological analysis sub-basin wise in the Aghanashini River catchment indicates that native forests enable a higher infiltration compared to degraded landscapes, which is explained through eco-hydrological indices (EHI), presented sub-basin wise in Supplementary Table S3. Sub-watersheds with native vegetation have a higher EHI (greater than 1), indicating higher infiltration and storage than water withdrawal due to evapotranspiration, sufficient to meet societal water requirements. The study highlights that native vegetation forests play a decisive role in retaining the water in the catchment through infiltration to sub-surface regions, which helps cater to ecological and societal demands.

The eco-hydrological footprint in the Aghanashini River basin at the sub-catchment level is illustrated in Figure 5. The hydrological footprint shows the water scarcity situation in sub-catchment 1 (in the eastern transition zones towards Sirsi town). In contrast, sub-catchments in the Ghats and Coasts (i.e., 2 to 9) show sufficient water status, catering the societal (domestic, irrigation, horticulture, and livestock) and ecological needs. The dense forest cover of native species in hilly regions (Ghats) has enhanced the water retention capability (through infiltration), which caters to the respective sub-basins' societal and ecological water demand.

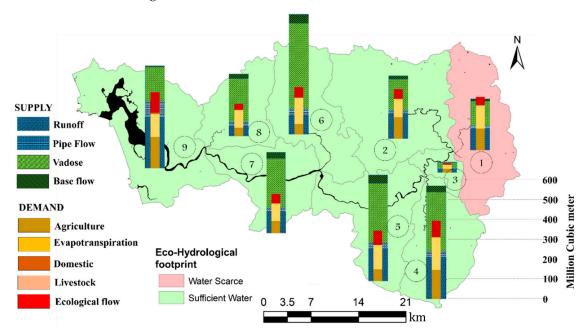



Figure 5. Eco-hydrological footprint of Aghanashini River.

Streams were classified based on the duration of water flow and quantum as perennial (with 12 months of flow or Category A), intermittent (6–8 months of flow, Category B or C), and seasonal (4 months during the monsoon, Category D). The streams are perennial when their catchment is dominated by native species of vegetation (>60%). This is mainly due to infiltration or percolation in the catchment as the soil is porous with native species. Diverse microorganisms interact with plant roots and the soil, which helps transfer nutrients from the soil to plants and make the soil porous [21]. Soil samples of perennial stream catchments have the highest moisture content (61.47 to 61.57%), higher nutrients (C, N, and K), and lower bulk density (0.50 to 0.57 g/cc). In comparison, soil samples from intermittent and seasonal stream catchments had higher bulk density (0.87–1.53 g/cc) and relatively lower nutrients. Figure 5 confirms the role of native forests (contiguous or interior forests) in

Water 2022, 14, 977 10 of 19

sustaining the water, evident from the occurrence of perennial streams compared to the intermittent or seasonal streams in the catchment dominated by degraded forest patches.

Flow assessment in sub-catchments of Aghanashini indicated that forests, monoculture plantations, and agriculture played a significant role in regulating the quantum and duration of flow in streams. In sub-catchment 1 (i.e., the transition regions near Sirsi town), the catchment is dominated by monoculture plantations. The flow duration in streams is 8 to 9 months (i.e., category B). In contrast, most of the streams in other sub-catchments had water for 12 months (perennial), highlighting the role of native vegetation (Figure 6) in sustaining water throughout the year. Hence, the study emphasizes the need to maintain native vegetation cover (of >50%) in catchments of streams and rivers to sustain water during all seasons.

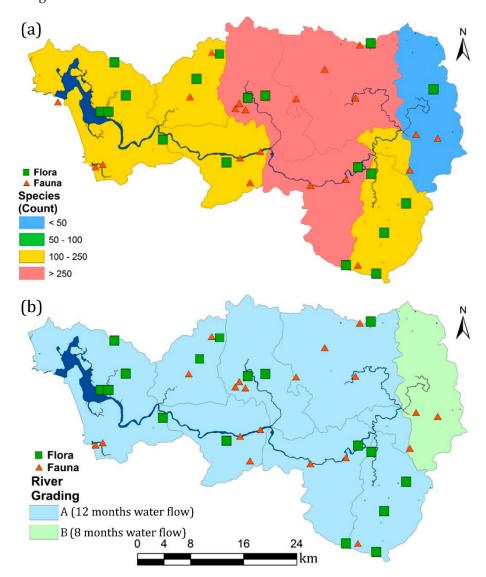

**Figure 6.** (a) Species distribution, (b) species distribution with the water availability—Ecology and hydrologic regime linkages in the Aghanashini River basin.

Figure 6 also depicts the distribution of endemic flora and fauna (threatened categories—critically endangered, endangered, vulnerable, and near-threatened) across sub-basins in the river catchment. Biodiversity, ecology, and hydrology linkages with the land-use dynamics in sub-catchments are evident from the comparative analyses of interior forest cover, flow duration, eco-hydrological footprint, and species distribution.

Water 2022, 14, 977 11 of 19

Contiguous forests with native vegetation species have aided in sustaining the water demand (ecological and societal) and supported diverse taxa, evident from the occurrence of rare and unique endemic and endangered taxa in the region. The river catchment with the numerous swamps (Myristica) and endemic taxa habitats constitute the hottest biodiversity hotspot. The current study conforms to the earlier research investigations across major rivers focusing on diatom species and land cover dynamics in the catchment [21]. The Aghanashini River basin supports the host of diverse epilithic diatoms: *Achnanthes minutissima, Achnanthidium* sp., *Brachysira neoexilis, Brachysira* sp., *Brachysira wygaschii, Cocconeis placentula, Cymbella* sp., *Eunotia minor, Eunotia rhomboidea, Fragilaria biceps, Fragilaria ulna, Gomphonema difformum, Gomphonemadi minutum, Gomphonema gandhii, Gomphonema parvulum, Gomphonema sp., Navicula cryptocephala, Navicula leptostriata, Navicula* sp., Navicula symmetrica, Planothidium frequentissimum, and Planothidium sp. [77,78]. The study highlights that the catchment's integrity determines the diatom species composition and water quality in the streams.

#### 3.3. Assessment of Water Quality and Composition

The physicochemical assessment (18 parameters) reveals that the water quality parameters varied across sampling stations during the study period. The average values of physicochemical parameters at different sampling sites are presented in Supplementary Table S4. Yaana (YK) has the highest pH, total alkalinity, total hardness, calcium, and magnesium among the sampled locations. In contrast, AG has the least TDS, EC, total alkalinity, pH, total hardness, calcium, magnesium, and nitrate. Variations in pH depend on the amount of carbonate, bicarbonate, and free carbon dioxide in the water [79]. An increase in the number of ions increases the TDS, EC, and total hardness. The increase in total solids concentration is attributed to clay and silt particles in stream water [80]. Higher alkalinity in water indicates higher amounts of hydroxides, carbonates, nitrates, phosphates, and sulphates [81]. Dissolved oxygen in water bodies depends on temperature, streamflow, aeration, photosynthetic rate, and the presence of organic matter [82,83]. Orthophosphate and nitrate are limiting nutrients that decide the productivity of freshwater ecosystems. An increase in nitrate and phosphate occurs due to inputs from nearby agricultural fields, and an increase in water velocity at the downstream improves water quality [84].

Pearson's correlation coefficient (r) was computed with *p*-values to understand the relationship among physicochemical parameters [85], which reveals that TDS is strongly positively correlated with EC, pH, total hardness, total alkalinity, calcium, and magnesium (refer Supplementary Table S5). TDS increases with EC because the charged ions (cations and anions) conduct electricity [86]. Correlation analyses reveal that (i) EC is positively correlated with pH, total alkalinity, total hardness, calcium, and magnesium; (ii) pH is positively correlated with total alkalinity, total hardness, calcium, and magnesium; and (iii) total alkalinity are positively correlated with total hardness, calcium, and magnesium. Hardness is caused by cations such as calcium and magnesium and anions such as carbonate, bicarbonate, and chloride. BOD and COD are used to assess organic matter present in both suspended and dissolved forms in water [87].

Wide seasonal variation is observed in the physicochemical parameters across monitored locations. Parameters such as turbidity, DO, orthophosphate, BOD, and COD were high during monsoon due to turbulence and the transport of sediments through run-off. In contrast, the pH was alkaline in the post-monsoon season due to the photosynthetic activities of algae. Water temperature, total alkalinity, total hardness, calcium, magnesium, and chloride were high in the pre-monsoon with high evaporation and low water level. The varied water quality across seasons in monitored locations is due to changes in water quantity, flow, weather, and land use in the catchment.

Figure 7 provides the season-wise WQI of monitored streams. During the monsoon season, YK, YNK, and MH showed poor water quality [87–89]. Other sites such as BGT, BE, AGT2, AG, AGT1, and HA showed good water quality [90–92]. Monitoring sites YK, YNK, BGT, and AGT2 showed a water quality status unsuitable for drinking [92,93], whereas

Water 2022, 14, 977 12 of 19

sites such as BE, AGT1, and MH showed inferior water quality in the post-monsoon season [87,92]. YK reflected a water quality status unfit for drinking [94,95]; BE and BGT had poor water quality [95,96]; and YNK and AGT2 had inferior water quality during the pre-monsoon season [97,98]. Increased pollutants, reduced river flow, and agricultural run-off govern stream water quality [97,99,100].


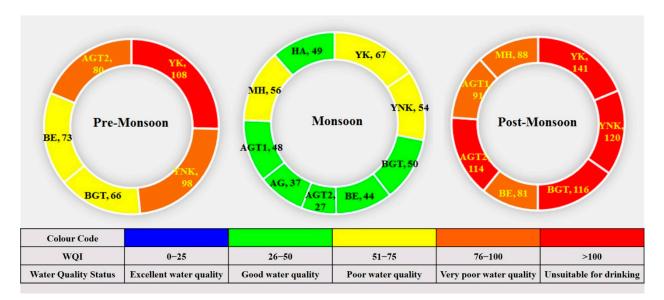


Figure 7. WQI of monitored streams during pre-monsoon, monsoon, and post-monsoon seasons.

Cluster analysis (CA) grouped sampling sites based on the similarity of water quality [101,102]. Hierarchical cluster analysis [103–105] yielded a dendrogram (Figure 8) that grouped nine sampling sites into three clusters (G1, G2, and G3) based on the similarity of their physicochemical characteristics. Here, G1 has less polluted stations such as YNK, BGT, AGT2, AGT1, and MH, with a lower quantum of all parameters except sodium. G2 has moderately polluted stations such as BE, AG, and HA with higher physicochemical parameters (such as WT, turbidity, COD, BOD, chloride, orthophosphate, and potassium), and discharge. Station G3 (YK) has higher values for physicochemical parameters (such as EC, TDS, pH, total alkalinity, total hardness, calcium, magnesium, DO, and nitrate) due to the inherent catchment properties. Yaana [YK] is a tourist location prone to unregulated anthropogenic activities and waste (liquid and solid) mismanagement.



**Figure 8.** Dendrogram highlighting grouping of monitored streams based on physicochemical characteristics.

Water 2022, 14, 977 13 of 19

PCA was performed considering 17 variables, which include (i) physicochemical parameters, (ii) land use (Built-up: BU; Evergreen Forest: EF; Deciduous Forest: DF; Forest Plantation: FP; Horticulture: Horti and Agriculture: Agri), and (iii) catchment characteristics (Flow Duration: FlowD) (Supplementary Table S6). The PCA yielded four principal components, which accounted for 90.68% of the total variance. The first component, PC1 explained about 49.75% of the total variance and had positive loading on EC, pH, DO, total alkalinity, total hardness, evergreen forest, and flow duration (Table S6), whereas there was negative loading on the deciduous forest. The decomposition of litter and the leaching of ionic contents (Na<sup>+</sup>, K<sup>+</sup>, Mg<sup>2+</sup>, Ca<sup>2+</sup>, and Cl<sup>-</sup>) in forested watersheds alter the stream water quality [106]. These ions increase the EC, hardness, alkalinity, and pH of water, which favors algae growth and eventually increases DO levels. The second component, PC2 explains about 23.05% of the total variance and has positive loadings on nitrate, built up, orthophosphate, and turbidity, whereas it has negative loadings on forest plantation. This is attributed to pollution from domestic sewage that increased the nutrient levels. The third component, PC3, was responsible for 11.35% of the total variance and had positive loadings on agriculture, horticulture, BOD, and COD. This factor represented pollution from untreated/raw non-point domestic discharge that increased organic matter levels. The fourth factor, PC4, was responsible for 6.54% of the total variance and had positive loadings on agriculture, orthophosphate, and DO. This factor highlights pollution due to agricultural run-off. The input of pesticides and synthetic fertilizers from agricultural fields altered the chemical integrity of pristine water resources, affecting the hydrology and ecology [66]. The land-use changes with enhanced anthropogenic activities have altered run-off patterns and flow regimes [107–109]. Vegetative cover, topography, slope, and quantum of rainfall in a catchment decide flow in streams [108,110-114], evident from the increased annual surface run-off of  $45\pm14\%$  with the conversion of forest landscape to other land uses (decline of forests by 49.34% with an increase in built-up, and open area).

#### 4. Conclusions

Riverine ecosystems are disturbed by human interference. The current study affirms that burgeoning anthropogenic activities resulted in the loss of contiguous interior forest cover, leading to forest fragmentation and the decline of ecologically sensitive habitats. The area under non-forest has increased to 49.34% (in 2018). Field investigations and subsequent data analyses reveal that factors such as the type of forest cover, monoculture plantation, and agriculture played a crucial role in sustaining the water in the ecosystem, evident from the flow regime. The sub-watersheds in Aghanashini with native vegetation had higher eco-hydrological indices (EHI). The eco-hydrological footprint assessment at the sub-watershed level reveals that native vegetation forests in the catchment sustain water. The relationship is evident from water availability during all 12 months in streams with a native vegetation cover of >60% in the catchment, compared to the seasonal streams in the catchment with a vegetation cover of <30%. The study highlights that streams are perennial in the catchment with a native forest cover of >60% and a higher number of endemic plant species, confirming the linkage between ecology and hydrology with land-use dynamics. The hydro-ecological investigation provides invaluable insights into the need for integrated approaches in river basin management in an era dominated by mismanagement of river catchments with the enhanced deforestation process, inappropriate cropping, and poor water use efficiency. The premium should be on conserving the remaining evergreen and semi-evergreen forests, which are vital for water security (perennial streams) and food security (sustenance of biodiversity).

Pearson's correlation coefficient revealed a high correlation among ionic parameters. The WQI results represented in a single number enabled the assessment of overall water quality during the monsoon, post-monsoon, and pre-monsoon seasons. Multivariate statistical approaches applied to water quality data of streams in Chandikaholé's sub-catchments of the Aghanashini River basin helped to understand pollution sources and site suitability. Streams were categorized as less polluted, moderately polluted, and highly polluted sites

Water 2022, 14, 977 14 of 19

based on their similarities in the water quality variables after the cluster analysis. A principal component analysis revealed that EC, pH, DO, total alkalinity, total hardness, evergreen forest, and flow duration play a crucial role in streams. The current study provides insights into the role of forests with native species in sustaining the local demand by maintaining the hydrological regime and preserving water quality, which is helpful in the watershed (catchment or basin) management by the respective government agencies.

The research outcome helps in developing the appropriate mitigation measures to maintain river basins' ecological and hydrological integrity to sustain water. In addition, it helps in communicating with the public and decision makers to implement prudent management of the catchment through participatory approaches involving all stakeholders.

The current study is based on monitoring a free-flowing river in the Western Ghats, with the hot moist sub-humid climate regime (with a catchment of 1449 km²), which has to be validated for the larger spatial extent river catchments covering diverse agroclimatic regime. The next phase of the research focuses on applying this protocol for the Krishna River catchment with the wider agroclimatic regime and across administrative regions.

**Supplementary Materials:** The following supporting information can be downloaded at: https://www.mdpi.com/article/10.3390/w14060977/s1, Figure S1: Method for eco-hydrological and environmental regime assessment; Table S1: Details of data with sources; Table S2: Category-wise land use (with accuracy assessment) and forest fragmentation extent (in percentage); Table S3: Sub-basin wise forests and eco-hydrological status; Table S4: Average values of physicochemical parameters at different sampling sites; Table S5: Correlation coefficient matrix of water quality parameters of streams; Table S6: Loadings of 17 variables extracted from PCA.

**Author Contributions:** T.V.R. designed the experiments, finalized field experiments, funding acquisition, writing of the manuscript, editing, and final review; V.S. collected experimental data of hydrologic regime, spatial data analyses, a draft of the part of the manuscript; A.K.S. and S.V. collected field data (water quality), field samples analyses, data analyses, writing a part of the manuscript; B.S. carried out land use and fragmentation analyses using remote sensing data, compiled flora and fauna details, and wrote those sections in the manuscript; B.H.A. completed the manuscript writing, and review. All authors have read and agreed to the published version of the manuscript.

**Funding:** This research was funded by (i) ENVIS Division, The Ministry of Environment, forests and climate change (MoEFCC), Government of India [SP/DEOO-20-001] and (iv) Indian Institute of Science [IISc R1011].

**Institutional Review Board Statement:** The publication is based on the original research and has not been submitted elsewhere for publication or web hosting. The research does not involve either humans, animals, or tissues.

**Informed Consent Statement:** Our research is commissioned by the ENVIS Division, The Ministry of Environment, Forests and Climate Change (MoEFCC), Government of India, and hence no further permission is required as the field work was carried out in the non-restricted areas.

Data Availability Statement: Not applicable.

**Acknowledgments:** We thank Sreekanth Naik and Vishnu D Mukri for their assistance during the field data collection. We thank all the stakeholders of the Aghanishini River basin for actively taking part in the scientific discussions and cooperation during field data compilation. We are grateful to the official languages section at IISc for the assistance in language editing.

**Conflicts of Interest:** The authors declare that they have no known competing financial interest or personal relationships that could have appeared to influence the work reported in this paper.

#### References

- 1. Khatoon, N.; Khan, A.H.; Rehman, M.; Pathak, V. Correlation study for the assessment of water quality and its parameters of Ganga River, Kanpur, Uttar Pradesh, India. *IOSR J. Appl. Chem.* **2013**, *5*, 80–90. [CrossRef]
- 2. Glatzle, A.; Reimer, L.; Núñez-Cobo, J.; Smeenk, A.; Musálem, K.; Laino, R. Groundwater dynamics, land cover and salinization in the dry Chaco in Paraguay. *Ecohydrol. Hydrobiol.* **2020**, *20*, 175–182. [CrossRef]
- 3. Gleick, P.H. Basic water requirements for human activities: Meeting basic needs. Water Int. 1996, 21, 83–92. [CrossRef]

Water 2022, 14, 977 15 of 19

4. Ramachandra, T.V.; Bharath, S.; Chandran, M.D.S. Geospatial analysis of forest fragmentation in Uttara Kannada District, India. For. Ecosyst. 2016, 3, 10. [CrossRef]

- 5. Ramachandra, T.V.; Setturu, B.; Rajan, K.S.; Chandran, M.D.S. Modelling the forest transition in Central Western Ghats, India. *Spat. Inf. Res.* **2017**, .25, 117–130. [CrossRef]
- 6. Dibaba, W.T.; Demissie, T.A.; Miegel, K. Watershed hydrological response to combined land use/land cover and climate change in highland Ethiopia: Finchaa catchment. *Water* **2020**, *12*, 801. [CrossRef]
- 7. Hyandye, C.B.; Worqul, A.; Martz, L.W.; Muzuka, A.N. The impact of future climate and land use/cover change on water resources in the Ndembera watershed and their mitigation and adaptation strategies. *Environ. Syst. Res.* **2018**, 7, 7. [CrossRef]
- 8. Kummu, M.; Guillaume, J.H.; de Moel, H.; Eisner, S.; Flörke, M.; Porkka, M.; Siebert, S.; Veldkamp, T.I.; Ward, P.J. The world's road to water scarcity: Shortage and stress in the 20th century and pathways towards sustainability. *Sci. Rep.* **2016**, *6*, 38495. [CrossRef] [PubMed]
- 9. Lambin, E.F.; Geist, H.J.; Lepers, E. Dynamics of land-use and land-cover change in tropical regions. *Annu. Rev. Eviron. Resour.* **2003**, *28*, 205–241. [CrossRef]
- 10. Jain, S.K. Assessment of environmental flow requirements for hydropower projects in India. *Curr. Sci.* **2015**, *108*, 1815–1825. Available online: https://www.currentscience.ac.in/Volumes/108/10/1815.pdf (accessed on 18 March 2020).
- 11. Singh, R.; Singh, G.S. Integrated management of the Ganga River: An ecohydrological approach. *Ecohydrol. Hydrobiol.* **2019**, 20, 153–174. [CrossRef]
- 12. Ramachandra, T.V.; Bharath, S.; Bharath, H.A. Spatio-temporal dynamics along the terrain gradient of diverse landscape. *J. Environ. Eng. Landsc. Manag.* **2014**, 22, 50–63. [CrossRef]
- 13. Ramachandra, T.V.; Chandran, M.D.S.; Vinay, S.; Sudarshan, P.B.; Vishnu, D.M.; Rao, G.R.; Shrikanth, N.; Bharath, H.A. Sacred Groves (Kan Forests) of Sagara Taluk, Shimoga District; Sahyadri Conservation Series: 54; ENVIS Technical Report 102; Environmental Information System (ENVIS), Centre for Ecological Sciences, Indian Institute of Science: Bangalore, India, 2016.
- 14. Ramachandra, T.V.; Bharath, S.; Rajan, K.S.; Chandran, M.D.S. Stimulus of developmental projects to landscape dynamics in Uttara Kannada, Central Western Ghats. *Egypt. J. Remote Sens. Space Sci.* **2016**, *19*, 175–193. [CrossRef]
- 15. Bhat, M.; Nayak, V.N.; Chandran, M.D.S.; Ramachandra, T.V. Impact of hydroelectric projects on finfish diversity in the Sharavathi River estuary of Uttara Kannada district, central west coast of India. *Int. J. Environ. Sci.* **2014**, *5*, 58–66. [CrossRef]
- 16. Ramachandra, T.V.; Chandran, M.D.S.; Joshi, N.V.; Bhoominathan, M. *Edible Bivalves of Central West Coast, Uttara Kannada District, Karnataka, India*; Sahyadri Conservation Series 17, ENVIS Technical Report 48; Environmental Information System (ENVIS), Centre for Ecological Sciences, Indian Institute of Science: Bangalore, India, 2012. Available online: http://wgbis.ces.iisc.ernet.in/biodiversity/pubs/ETR/ETR48/conclusion.htm (accessed on 29 March 2020).
- 17. Ramachandra, T.V.; Bharath, S.; Chandran, M.D.S.; Joshi, N.V. Salient ecological sensitive regions of Central Western Ghats, India. *Earth Syst. Environ.* **2018**, *2*, 15–34. [CrossRef]
- 18. Ramachandra, T.V.; Setturu, B.; Vinay, S. Ecological sustainability of riverine ecosystems in Central Western Ghats. *J. Biodivers*. **2018**, *9*, 25–42.
- 19. Vijay, K.; Ramachandra, T.V. Environmental Management; The Energy and Resources Institute (TERI): New Delhi, India, 2006.
- 20. Ramachandra, T.V.; Soman, D.; Naik, A.D.; Chandran, M.D.S. Appraisal of forest ecosystems goods and services: Challenges and opportunities for conservation. *J. Biodivers.* **2017**, *8*, 12–33. [CrossRef]
- 21. Ramachandra, T.V.; Vinay, S.; Bharath, S.; Chandran, M.D.; Aithal, B.H. Insights into riverscape dynamics with the hydrological, ecological, and social dimensions for water sustenance. *Curr. Sci.* **2020**, *118*, 1379–1393. [CrossRef]
- 22. Aghsaei, H.; Dinan, N.M.; Moridi, A.; Asadolahi, Z.; Delavar, M.; Fohrer, N.; Wagner, P.D. Effects of dynamic land use/land cover change on water resources and sediment yield in the Anzali wetland catchment, Gilan, Iran. *Sci. Total Envi.* **2020**, 712, 136449. [CrossRef]
- 23. Sharma, D.; Kansal, A. Assessment of river quality models: A review. Rev. Environ. Sci. Biotechnol. 2013, 12, 285–311. [CrossRef]
- 24. Peñas, F.J.; Juanes, J.A.; Galván, C.; Medina, R.; Castanedo, S.; Álvarez, C.; Bárcena, J.F. Estimating minimum environmental flow requirements for well-mixed estuaries in Spain. *Estuar. Coast. Shelf Sci.* **2013**, *134*, 138–149. [CrossRef]
- 25. International Water Centre. The Brisbane Declaration. 2007. Available online: http://www.watercentre.org/news/declaration (accessed on 10 November 2019).
- 26. Ramachandra, T.V.; Vinay, S.; Bharath, H.A. Environmental flow assessment in a lotic ecosystem of Central Western Ghats, India. *Hydrol. Curr. Res.* **2016**, *7*, 1000248. [CrossRef]
- 27. Tharme, R.E. A global perspective on environmental flow assessment: Emerging trends in the development and application of environmental flow methodologies for rivers. *River Res. Appl.* **2003**, *19*, 397–441. [CrossRef]
- 28. Stoeglehner, G.; Edwards, P.; Daniels, P.; Narodoslawsky, M. The water supply footprint (WSF): A strategic planning tool for sustainable regional and local water supplies. *J. Clean. Prod.* **2011**, *19*, 1677–1686. [CrossRef]
- 29. Davies-Colley, R.J. River Water Quality in New Zealand: An Introduction and Overview. In *Ecosystem Services in New Zealand: Conditions and Trends; Manaaki Whenua Press: Lincoln, New Zealand, 2013; pp. 432–447.*; Manaaki Whenua Press: Lincoln, New Zealand, 2013; pp. 432–447.
- 30. Xu, H.S.; Xu, Z.X.; Wu, W.; Tang, F.F. Assessment and spatiotemporal variation analysis of water quality in the Zhangweinan River Basin, China. *Procedia Environ. Sci.* **2012**, *13*, 1641–1652. [CrossRef]

Water 2022, 14, 977 16 of 19

31. Gyawali, S.; Techato, K.; Yuangyai, C.; Monprapusson, S. Evaluation of surface water quality using multivariate statistical techniques: A case study of Utapao river basin, Thailand. *KMITL Sci. Technol. J.* **2012**, *12*, 7–20.

- 32. Rytwinski, T.; Taylor, J.J.; Bennett, J.R.; Smokorowski, K.E.; Cooke, S.J. What are the impacts of flow regime changes on fish productivity in temperate regions? A systematic map protocol. *Environ. Evid.* **2017**, *9*, 7. [CrossRef]
- 33. Ramachandra, T.V.; Sudarshan, P.B.; Mahesh, M.K.; Vinay, S. Spatial patterns of heavy metal accumulation in sediments and macrophytes of Bellandur wetland, Bangalore. *J. Environ. Manag.* **2018**, 206, 1204–1210. [CrossRef]
- 34. Ramachandra, T.V.; Narayan, N.R. Heavy metal in the food chain—Consequences of polluting water bodies. *Green Chem. Technol. Lett.* **2021**, 7, 7–17. [CrossRef]
- 35. Naher, T.; Chowdhury, M.A. Assessment and correlation analysis of water quality parameters: A case study of Surma river at Sylhet division, Bangladesh. *Int. J. Eng. Trends Technol.* **2017**, *53*, 126–136. [CrossRef]
- 36. Liyanage, C.P.; Yamada, K. Impact of population growth on the water quality of natural water bodies. *Sustainability* **2017**, *9*, 1405. [CrossRef]
- 37. Chounlamany, V.; Tanchuling, M.A.; Inoue, T. Spatial and temporal variation of water quality of a segment of Marikina River using multivariate statistical methods. *Wat. Sci. Technol.* **2017**, *76*, 1510–1522. [CrossRef] [PubMed]
- 38. Vadde, K.K.; Wang, J.; Cao, L.; Yuan, T.; McCarthy, A.J.; Sekar, R. Assessment of water quality and identification of pollution risk locations in Tiaoxi River (Taihu Watershed), China. *Water* 2018, 10, 183. [CrossRef]
- 39. Varol, M.; Gökot, B.; Bekleyen, A.; Şen, B. Water quality assessment and apportionment of pollution sources of Tigris River (Turkey) using multivariate statistical techniques—A case study. *River Res. Appl.* **2012**, *28*, 1428–1438. [CrossRef]
- 40. Pejman, A.H.; Bidhendi, G.N.; Karbassi, A.R.; Mehrdadi, N.; Bidhendi, M.E. Evaluation of spatial and seasonal variations in surface water quality using multivariate statistical techniques. *Int. J. Environ. Sci. Technol.* **2009**, *6*, 467–476. Available online: <a href="https://link.springer.com/content/pdf/10.1007%2FBF03326086.pdf">https://link.springer.com/content/pdf/10.1007%2FBF03326086.pdf</a> (accessed on 12 January 2020). [CrossRef]
- 41. Ramachandra, T.V.; Vinay, S.; Bharath, S.; Shashishankar, A. Eco-Hydrological footprint of a river basin in Western Ghats. *Yale. J. Biol. Med.* **2018**, *91*, 431–444. Available online: https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6302628/ (accessed on 12 January 2020). [PubMed]
- 42. Kamath, U.S. (Ed.) *Gazetteer of India, Karnataka State-Uttara Kannada District*; Director of Print, Stationery and Publications at the Government Press, Government of Karnataka: Bangalore, India, 1984. Available online: http://gazetteer.kar.nic.in/gazetteer/distGazetteer.html (accessed on 11 February 2020).
- 43. Survey of India, Department of Science & Technology. Nakshe. 2018. Available online: http://www.soinakshe.uk.gov.in/(accessed on 11 December 2019).
- 44. University of Agriculture Sciences. E-Krishi. 2020. Available online: http://e-krishiuasb.karnataka.gov.in/Weather/ViewWeatherData.aspx?depID=10&QueryID=0 (accessed on 20 August 2020).
- 45. Office of the Registrar General & Census Commissioner, The Ministry of Home Affairs. Census of India. 2011. Available online: <a href="http://www.censusindia.gov.in">http://www.censusindia.gov.in</a> (accessed on 7 February 2017).
- 46. National Bureau of Soil Survey and Land Use Planning. Soil status of Karnataka. ICAR-NBSS&LUP. 1996. Available online: https://www.nbsslup.in/ (accessed on 5 March 2019).
- 47. United States Geological Survey. Earth Explorer; United States Geological Survey: Reston, VA, USA, 2015.
- 48. Global Precipitation Climatology Centre (GPCC). National Oceanic and Atmospheric Administration. Earth System Research Laboratory. Available online: <a href="https://www.esrl.noaa.gov/psd/data/gridded/data.cpc.globalprecip.html">https://www.esrl.noaa.gov/psd/data/gridded/data.cpc.globalprecip.html</a> (accessed on 17 February 2019).
- 49. India Meteorological Department, The Ministry of Earth Sciences (MoES). Hydrometeorological Services. Available online: <a href="http://www.imd.gov.in/pages/services\_hydromet.php">http://www.imd.gov.in/pages/services\_hydromet.php</a> (accessed on 15 June 2019).
- 50. Karnataka Government. Directorate of Economics and Statistics. 2017. Available online: des.kar.nic.in/ (accessed on 12 September 2019).
- 51. Food and Agriculture Organization. Meteorological Data. 2017. Available online: http://www.fao.org/docrep/X0490E/x0490e07.htm (accessed on 30 January 2019).
- 52. Hijmans, R.J.; Cameron, S.E.; Parra, J.L.; Jones, P.; Jarvis, A.; Richardson, K. WorldClim, version 1.4. 2007. Available online: http://www.worldclim.org (accessed on 11 August 2019).
- 53. Department of Animal Husbandry and Veterinary Services, Government of Karnataka. Livestock Census, 2012 and 2018. Available online: http://www.ahvs.kar.nic.in/en-reportsstat.html (accessed on 2 February 2017).
- 54. Google. Google Earth. 2018. Available online: https://www.google.com/intl/en\_in/earth/ (accessed on 20 May 2020).
- 55. National Remote Sensing Centre, Indian Space Research Organization. Bhuvan. 2018. Available online: http://bhuvan.nrsc.gov.in/ (accessed on 20 May 2020).
- 56. Mutreja, K.N. Applied Hydrology, 4th ed.; Tata McGraw-Hill: New Delhi, India, 1995.
- 57. Jensen, J.R. Introductory Digital Image Processing: A Remote Sensing Perspective, 2nd ed.; Pearson: London, UK, 1996.
- 58. Lillesand, T.M.; Kiefer, R.W.; Chipman, J.W. Remote Sensing and Image Interpretation; Lloydia: Cincinnati, OH, USA, 2004.
- 59. Ramachandra, T.V.; Bharath, H.A.; Gouri, K.; Vinay, S. Green Spaces in Bengaluru: Quantification through Geospatial Techniques. *Indian For.* **2017**, *143*, 307–320.
- 60. Ramachandra, T.V. Hydrological responses at regional scale to landscape dynamics. *J. Biodivers.* **2014**, *5*, 11–32. Available online: http://wgbis.ces.iisc.ernet.in/energy/water/paper/Hydrological-Responses/index.html (accessed on 20 May 2018). [CrossRef]

Water 2022, 14, 977 17 of 19

61. American Public Health Association (APHA); American Water Works Association (AWWA); WEF (World Economic Forum). Standard Methods for the Examination of Water and Wastewater, 21st ed.; American Public Health Association: Washington, DC, USA, 2005.

- 62. PAST Statistical Software. Available online: https://palaeo-electronica.org/2001\_1/past/past.pdf (accessed on 2 February 2017).
- 63. Daniels, R.R.J.; Venkatesan, J. Western Ghats-Biodiversity, People, Conservation; Rupa & Company: New Delhi, India, 2008.
- 64. Jain, S.K. Assessment of environmental flow requirements. Hydrol. Process. 2012, 27, 3472–3476. [CrossRef]
- 65. Karnataka Forest Department. *Karnataka Forest Department Management Plan for Sharavathi Valley Wildlife Sanctuary;* Karnataka Forest Department: Bangalore, India, 2007.
- 66. Ramachandra, T.V.; Bharath, S.; Vinay, S. Visualisation of impacts due to the proposed developmental projects in the ecologically fragile regions-Kodagu district, Karnataka. *Prog. Disaster Sci.* **2019**, *3*, 1–14. [CrossRef]
- 67. Santoso, E.B.; Erli, H.K.D.M.; Aulia, B.U.; Ghozali, A. Concept of carrying capacity: Challenges in spatial planning (case study of East Java Province, Indonesia). *Procedia Soc. Behav. Sci.* **2014**, *135*, 130–135. [CrossRef]
- 68. Rao, G.R.; Chandran, M.D.S.; Ramachandra, T.V. Vegetation Studies in Sacred Groves and Adjacent Non-Sacred Forests of Central Western Ghats. In Proceedings of the Lake 2016: Conference on Conservation and Sustainable Management of Ecologically Sensitive Regions in Western Ghats, Moodbidri, India, 28–30 December 2016.
- 69. Vinay, S.; Bharath, S.; Bharath, H.A.; Ramachandra, T.V. Hydrologic model with landscape dynamics for drought monitoring. In Proceedings of the Joint International Workshop of ISPRS VIII/1 and WG IV/4 on Geospatial Data for Disaster and Risk Reduction, Hyderabad, India, 21–22 November 2013. Available online: http://wgbis.ces.iisc.ernet.in/energy/water/paper/isprs\_drought\_monitoring/index.htm (accessed on 30 May 2019).
- 70. Bhat, M.; Nayak, V.N.; Chandran, M.D.S.; Ramachandra, T.V. Fish distribution dynamics in the Aghanashini estuary of Uttara Kannada, west coast of India. *Curr. Sci.* **2014**, *106*, 1739–1744.
- 71. Ali, S.; Gururaja, K.V.; Ramachandra, T.V. *Schistura nilgiriensis* (Menon) in Sharavathi River Basin, Western Ghats, Karnataka. Zoos' *Print J.* **2005**, 20, 1784–1785. Available online: http://wgbis.ces.iisc.ernet.in/biodiversity/sdev/sus\_enews/menon/index.htm (accessed on 20 May 2019). [CrossRef]
- 72. Sreekantha; Gururaja, K.V.; Ramachandra, T.V. Nestedness pattern in freshwater fishes of the Western Ghats: An indication of stream islands along riverscapes. *Curr. Sci.* **2008**, *95*, 1707–1714.
- 73. Sreekantha; Chandran, M.D.S.; Mesta, D.K.; Rao, G.R.; Gururaja, K.V.; Ramachandra, T.V. Fish diversity in relation to landscape and vegetation in central Western Ghats, India. *Curr. Sci.* **2007**, 92, 1592–1603.
- 74. Sreekantha; Gururaja, K.V.; Remadevi, K.; Indra, T.J.; Ramachandra, T.V. Two species of fishes of the genus *Schistura* McClelland (Cypriniformes: Balitoridae) from Western Ghats. *Zoos' Print J.* **2006**, *21*, 2211–2216. [CrossRef]
- 75. ENVIS Sahyadri: Western Ghats Biodiversity Information System. 2017. Available online: http://wgbis.ces.iisc.ernet.in/biodiversity (accessed on 20 October 2017).
- 76. India Biodiversity Portal. 2018. Available online: http://indiabiodiversity.org/ (accessed on 20 October 2017).
- 77. Ramachandra, T.V.; Chandran, M.D.S.; Joshi, N.V.; Karthick, B.; Mukri, V.D. Ecohydrology of lotic systems in Uttara Kannada, Central Western Ghats, India. In *Environmental Management of River Basin Ecosystems*; Springer: Cham, Switzerland, 2015; pp. 621–665. [CrossRef]
- 78. Ramachandra, T.V.; Chandran, M.D.S.; Prakash, M.; Rao, G.R.; Bharath, S.; Bharath, H.A.; Harish, R.B.; Sumesh, D.; Gautham, K.; Sudarshan, P.B.; et al. *Biological Diversity, Ecology and Environment Impact Assessment with Mitigation Measures: Hubli-Ankola New Broad Gauge Railway Line*; CES Technical Report 125; Environmental Information, System (ENVIS), Centre for Ecological Sciences, Indian Institute of Science: Bangalore, India, 2012.
- 79. Talling, J.F. pH, the CO<sub>2</sub> system and freshwater science. Freshw. Rev. 2010, 3, 133–146. [CrossRef]
- 80. Alam, M.J.B.; Islam, M.R.; Muyen, Z.; Mamun, M.; Islam, S. Water quality parameters along rivers. *Int. J. Environ. Sci. Tech.* **2007**, 4, 159–167. [CrossRef]
- 81. Kumar, M.; Puri, A. A review of permissible limits of drinking water. *Indian J. Occup. Environ. Med.* **2012**, *16*, 40–44. [CrossRef] [PubMed]
- 82. Nas, S.S.; Bayram, A.; Nas, E.; Bulut, V.N. Effects of some water quality parameters on the dissolved oxygen balance of streams. *Pol. J. Environ. Stud.* **2008**, *17*, 531–538. Available online: http://www.pjoes.com/Effects-of-Some-Water-Quality-Parameters-r-non-the-Dissolved-Oxygen-Balance-of-Streams,88139,0,2.html (accessed on 12 January 2020).
- 83. Kale, V.S. Consequence of temperature, pH, turbidity and dissolved oxygen water quality parameters. *Int. Adv. Res. J. Sci. Eng. Technol.* **2016**, *3*, 186–190. [CrossRef]
- 84. Lescesen, I.; Pavić, D.; Dolinaj, D. Correlation between discharge and water quality: Case study Nišavariver: Serbia. *Geogr. Pannon.* **2018**, 22, 97–103. [CrossRef]
- 85. Barakat, A.; El Baghdadi, M.; Rais, J.; Aghezzaf, B.; Slassi, M. Assessment of spatial and seasonal water quality variation of Oum Er Rbia River (Morocco) using multivariate statistical techniques. *Int. Soil Water Conserv. Res.* **2018**, *4*, 284–292. [CrossRef]
- 86. Maqbool, F.; Malik, A.H.; Bhatti, Z.A.; Pervez, A.; Suleman, M. Application of regression model on stream water quality parameters. *Pak. J. Agric. Sci.* **2012**, *49*, 95–100. Available online: https://pakjas.com.pk/papers/1982.pdf (accessed on 14 January 2020).
- 87. Tyagi, S.; Sharma, B.; Singh, P.; Dobhal, R. Water quality assessment in terms of water quality index. *Am. J. Water Resour.* **2013**, *1*, 34–38. [CrossRef]

Water 2022, 14, 977 18 of 19

88. Etim, E.E.; Odoh, R.; Itodo, A.U.; Umoh, S.D.; Lawal, U. Water quality index for the assessment of water quality from different sources in the Niger Delta Region of Nigeria. *Front. Sci.* **2013**, *3*, 89–95. [CrossRef]

- 89. Oni, O.; Fasakin, O. The use of water quality index method to determine the potability of surface water and groundwater in the vicinity of a municipal solid waste dumpsite in Nigeria. *Am. J. Eng. Res.* **2016**, *5*, 96–101. Available online: http://www.ajer.org/papers/v5(10)/O0501096101.pdf (accessed on 14 January 2020).
- 90. Seth, R.; Mohan, M.; Singh, P.; Singh, R.; Dobhal, R.; Singh, K.P.; Gupta, S. Water quality evaluation of Himalayan rivers of Kumaun region, Uttarakhand, India. *Appl. Water Sci.* **2016**, *6*, 137–147. [CrossRef]
- 91. Qian, Y.; Migliaccio, K.W.; Wan, Y.; Li, Y. Surface water quality evaluation using multivariate methods and a new water quality index in the Indian River Lagoon, Florida. *Water Resour. Res.* **2007**, *43*, 1–10. [CrossRef]
- 92. Devi, W.S.; Singh, K.; Meitei, N. Assessment of water quality index of Nambol river, Manipur, India. *Univers. J. Environ. Res. Technol.* **2015**, *5*, 165–172. Available online: http://www.environmentaljournal.org/5-3/ujert-5-3-5.pdf (accessed on 14 January 2020).
- 93. Rameshbabu, K.; Selvanayagam, M. Water quality index of Kolavailake, Chengalpet, Tamil Nadu, India. *Int. J. Chem. Concepts* **2015**, *1*, 15–18.
- 94. Zeinalzadeh, K.; Rezaei, E. Determining spatial and temporal changes of surface water quality using principal component analysis. *J. Hydrol. Reg. Stud.* **2017**, *13*, 1–10. [CrossRef]
- 95. Najar, I.A.; Khan, A.B. Assessment of water quality and identification of pollution sources of three lakes in Kashmir, India, using multivariate analysis. *Environ. Earth Sci.* **2012**, *66*, 2367–2378. [CrossRef]
- 96. Chowdhury, S.; Al-Zahrani, M. Water quality change in dam reservoir and shallow aquifer: Analysis on trend, seasonal variability and data reduction. *Environ. Monit. Assess.* **2014**, *186*, 6127–6143. [CrossRef] [PubMed]
- 97. Mazlum, N.; Özer, A.; Mazlum, S. Interpretation of water quality data by principal components analysis. *Turk. J. Eng. Env. Sci.* **1999**, 23, 19–26. Available online: http://journals.tubitak.gov.tr/engineering/issues/muh-99-23-1/muh-23-1-3-96116.pdf (accessed on 15 January 2020).
- 98. Shrestha, S.; Kazama, F. Assessment of surface water quality using multivariate statistical techniques: A case study of the Fuji river basin. *Japan. Environ. Modell. Softw.* **2007**, 22, 464–475. [CrossRef]
- 99. Park, S.; Kazama, F.; Lee, S. Assessment of water quality using multivariate statistical techniques: A case study of the Nakdong River basin, Korea. *Environ. Eng. Res.* **2014**, *19*, 197–203. [CrossRef]
- 100. Liu, W.X.; Li, X.D.; Shen, Z.G.; Wang, D.C.; Wai, O.W.H.; Li, S.Y. Multivariate statistical study of heavy metal enrichment in sediments of the Pearl River Estuary. *Environ. Pollut.* **2003**, 121, 377–388. [CrossRef]
- 101. Wang, Y.; Wang, P.; Bai, Y.; Tian, Z.; Li, J.; Shao, X.; Mustavich, L.F.; Li, B.L. Assessment of surface water quality via multivariate statistical techniques: A case study of the Songhua River Harbin region, China. *J. Hydro. Environ. Res.* **2013**, *7*, 30–40. [CrossRef]
- 102. Isah, A.; Abdullahi, U.; Ndamitso, M.M. Application of multivariate methods for assessment of variations in rivers/streams water quality in Niger State, Nigeria. *Am. J. Theor. Appl. Stat.* **2013**, *2*, 176–183. [CrossRef]
- 103. Mushatq, B.; Raina, R.; Yaseen, T.; Wanganeo, A.; Yousuf, A.R. Variations in the physicochemical properties of Dal Lake, Srinagar, Kashmir. *Afr. J. Environ. Sci. Technol.* **2013**, *7*, 624–633. [CrossRef]
- 104. Azhar, S.C.; Aris, A.Z.; Yusoff, M.K.; Ramli, M.F.; Juahir, H. Classification of river water quality using multivariate analysis. *Procedia Environ. Sci.* **2015**, *30*, 79–84. [CrossRef]
- 105. Raghunath, H.M. Hydrology—Principles, Analysis and Design; Wiley Eastern Limited: New Delhi, India, 1985.
- 106. Kitamura, H. Leaching characteristics of anions and cations from evergreen leaves supplied to the stream bed and influences on stream water composition in the Southern Kyusyu Mountains. *Bull. Minamikyushu Univ.* **2009**, *39A*, 57–66. Available online: <a href="http://www.nankyudai.ac.jp/library/pdf/39A57-66.pdf">http://www.nankyudai.ac.jp/library/pdf/39A57-66.pdf</a> (accessed on 15 January 2020).
- 107. Kashaigili, J.J. Impacts of land-use and land-cover changes on flow regimes of the Usangu wetland and the Great Ruaha River, Tanzania. *Phys. Chem. Earth* **2008**, *33*, 640–647. [CrossRef]
- 108. Rodriguez-Martínez, J.; Santiago, M. *The Effects of Forest Cover on Base Flow of Streams in the Mountainous Interior of Puerto Rico*; 2010 (No. 2016-5142). U.S. Geological Survey Scientific Investigations Report 2016–5142; U.S. Geological Survey: Reston, VA, USA, 2017. Available online: https://pubs.usgs.gov/sir/2016/5142/sir20165142.pdf (accessed on 15 January 2020).
- 109. Guzha, A.C.; Rufino, M.C.; Okoth, S.; Jacobs, S.; Nóbrega, R.L.B. Impacts of land use and land cover change on surface run-off, discharge and low flows: Evidence from East Africa. *J. Hydrol. Reg. Stud.* **2018**, *15*, 49–67. [CrossRef]
- 110. Alobaidy, A.H.M.J.; Abid, H.S.; Maulood, B.K. Application of water quality index for assessment of Dokan lake ecosystem, Kurdistan region, Iraq. *J. Water Resour. Prot.* **2010**, 2, 792–798. [CrossRef]
- 111. Bunn, S.E.; Arthington, A.H. Basic principles and ecological consequences of altered flow regimes for aquatic biodiversity. *Environ. Manag.* 2002, 30, 492–507. [CrossRef] [PubMed]
- 112. Ramachandra, T.V.; Bharath, S. Geoinformatics based valuation of forest landscape dynamics in Central Western Ghats, India. *J. Remote Sens. GIS* **2018**, *7*, 2. [CrossRef]

Water 2022, 14, 977 19 of 19

113. Sincy, V.; Asulabha, K.S.; Vinay, S.; Vishnu, D.M.; Srikanth, N.; Subashchandran, M.D.; Ramachandra, T.V. Ecological status of lotic ecosystems in kans and non-kans of central Western Ghats. In Proceedings of the Lake 2016: Conference on Conservation and Sustai nable Management of Ecologically Sensitive Regions in Western Ghats, Moodbidri, India, 28–30 December 2016; Sahyadri Conservation Series 65, ENVIS Technical Report 120. Environmental Information System (ENVIS), Centre for Ecological Sciences, Indian Institute of Science: Bangalore, India, 2016.

114. Vinay, S.; Bharath, S.; Chandran, M.D.S.; Bharath, H.A.; Shashishankar, A.; Ramachandra, T.V. Hydro-ecological footprint of Sharavathi river basin. In Proceedings of the Lake 2018: Conference on Conservation and Sustainable Management of Riverine Ecosystems, Sirsi, India, 22–25 November 2018. Available online: wgbis.ces.iisc.ernet.in/biodiversity/sahyadri\_enews/newsletter/Issue69/vinay.html (accessed on 20 January 2020).